


**PDL Building Products
6070 Masonry Pre-assembled Door System**

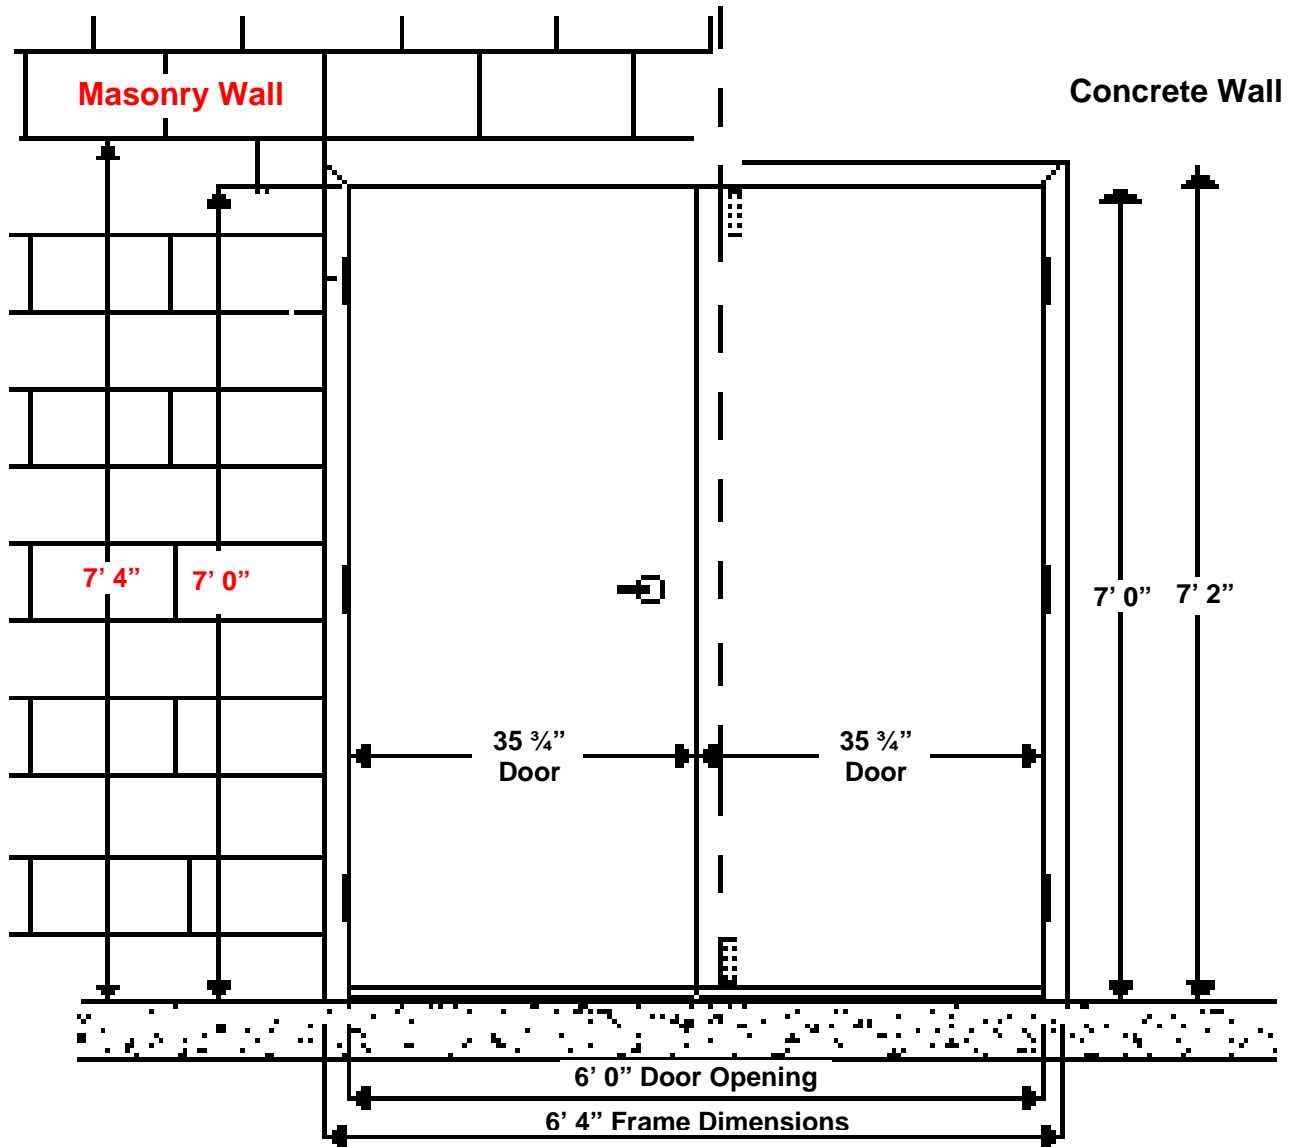

6070 Masonry Pre-assembled Door Includes The Following Components:

1. 20 Gauge, Galvanized, Insulated Door Leaf
2. 5 3/4", 16 Gauge, Galvanized, Insulated, Door Frame (2" or 4" Header)
3. 16 Gauge, Galvanized "Z" Astragal – Attached to the "Inactive" Leaf
4. Cylindrical Lever Lock – Grade 2 (26D Finish) – Installed on the "Active" Leaf Only
5. Surface Bolts (Top and Bottom) – Mounted on "Inactive" Leaf Only (26D Finish)
6. (6) Ball-Bearing Hinges – 4 1/2" x 4 1/2" with a Non-Removable Pin (26D Finish)
7. 5 3/4", Aluminum Threshold – ADA Compliant
8. (2) Door Bottom Sweeps with Drip Channel
9. Adjustable Full Aluminum Channel Weatherseal
10. (6) Wire Masonry Anchors (3 per side) or (8) Existing Opening Anchors (4 per side)
11. Packaging – Each Door System is Packaged in Heavy Duty Wood Crating
12. All Fasteners and Anchors Included for Complete Installation