


**PDL Building Products
6070 Standard Pre-assembled Door System**

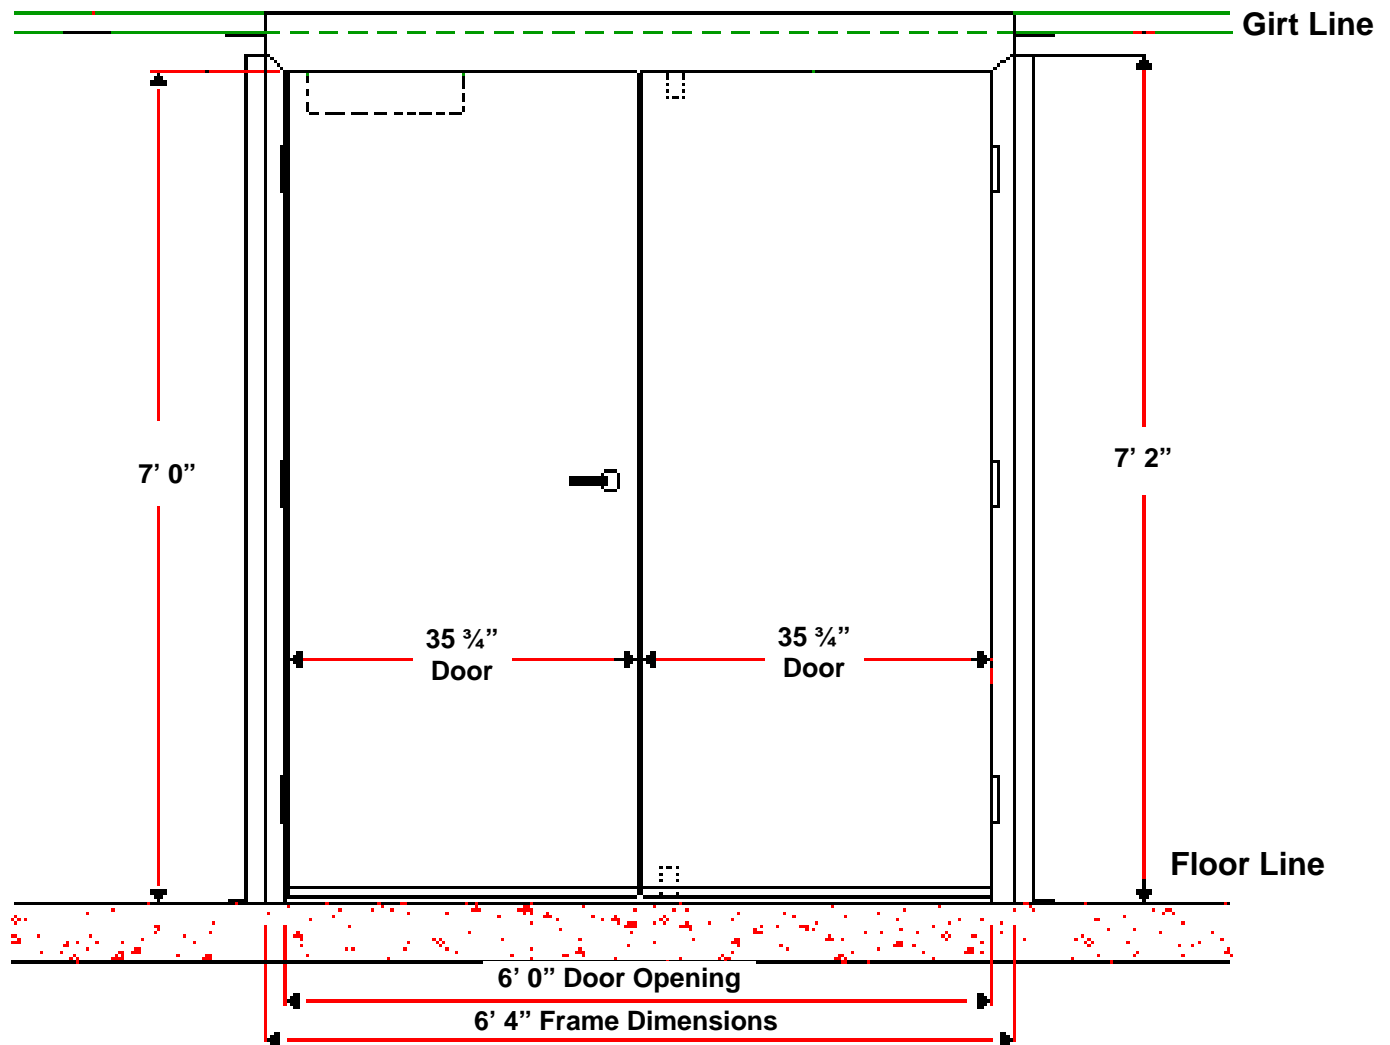

6070 Standard Pre-assembled Door Includes The Following Components:

1. 18 Gauge, Galvanized, Insulated Door Leafs
2. 5 3/4", 16 Gauge, Galvanized, Insulated, Door Frame
3. 16 Gauge, Galvanized "Z" Astragal – Attached to Inactive Leaf
4. 16 Gauge, Galvanized Subframe (Framed Opening). Sized to Match Girt Depth
5. (1) Cylindrical Lever Lock – Grade 2 (26D Finish) UL Rated – Installed on Active Leaf Only
6. (2) Surface Bolts (Top and Bottom) Attached to "Inactive" Leaf (26D Finish)
7. (6) Ball-Bearing Hinges – 4 1/2" x 4 1/2" with a Non-Removable Pin (26D Finish)
8. 5 3/4", Aluminum Threshold – ADA Compliant
9. (2) Door Bottom Sweeps with Drip Channel
10. Adjustable Full Aluminum Channel Weatherseal
11. 12 Gauge, Galvanized, Adjustable Mounting Clips
12. Packaging – Each Door System is Packaged in Heavy Duty Wood Crating
13. All Fasteners and Anchors Included for Complete Installation